

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number  
**WO 2004/010883 A1**

(51) International Patent Classification<sup>7</sup>: **A61B 18/12**

(21) International Application Number:  
PCT/US2003/022900

(22) International Filing Date: 23 July 2003 (23.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/398,620 25 July 2002 (25.07.2002) US  
60/413,410 25 September 2002 (25.09.2002) US

(71) Applicant (for all designated States except US): **SHERWOOD SERVICES AG [CH/CH]**; Bahnhofstrasse 29, CH-8200 Schaffhausen (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BUCHMAN III, Thomas L. [US/US]**; 11561 South Arapahoe Street, Olathe, KS 66062 (US).

(74) Agent: **DENNINGER, Douglas, E.**; Tyco Healthcare Group LP, 10 Glover Avenue, Norwalk, CT 06850 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ELECTROSURGICAL PENCIL WITH DRAG SENSING CAPABILITY**

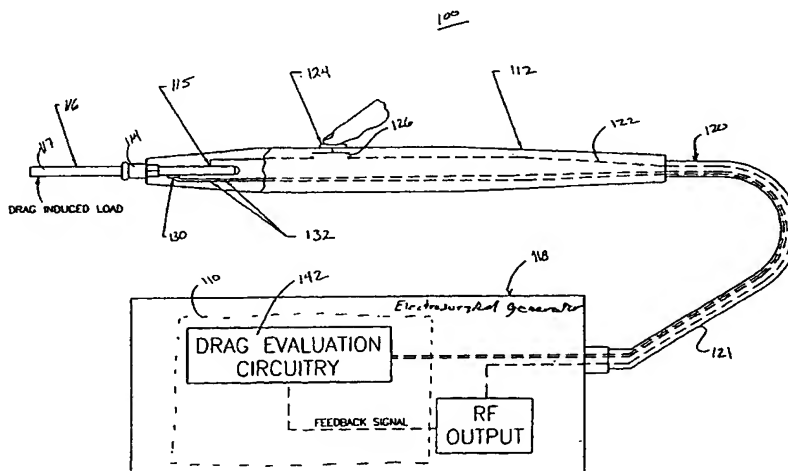

(57) Abstract: An electrosurgical pencil (100) configured and adapted to support an electrocautery blade (116). A strain gauge (130) is affixed to the proximal, end of the electrocautery blade and measures the displacement of the blade as a result of resistance and drag acting on the blade. The electrosurgical pencil also includes a meter electrically connected to the strain gauge for monitoring either a change in voltage, a change in electrical current or a change in optical wavelength. The amount of blade displacement as measured by the strain gauge is available for display to the surgeon and/or as sensory input for a control circuit in the electrosurgical generator (118) that modulates the generator output waveform. The electrosurgical pencil further includes a control circuit electrically coupled between the electrocautery blade and the electrosurgical generator. The control circuit is configured and adapted to control power supplied to electrocautery blade based on the displacement measured by the strain gauge.

WO 2004/010883 A1

## ELECTROSURGICAL PENCIL WITH DRAG SENSING CAPABILITY

5

### CROSS-REFERENCE TO RELATED APPLICATION

The present application claims priority of U.S. Provisional Patent Application Serial No. 60/398,620 filed July 25, 2002 and U.S. Provisional Patent Application Serial No. 60/413,410 filed September 25, 2002, the entire contents of each of which  
10 are incorporated herein by reference.

### BACKGROUND

#### 1. Technical Field

The present invention relates generally to an electrosurgical instrument and,  
15 more particularly to an electrosurgical pencil having drag sensing capabilities.

#### 2. Background of Related Art

Electrosurgical instruments have become widely used by surgeons in recent years. Accordingly, a need has developed for equipment that is easy to handle and operate, reliable and safe. By and large, most electrosurgical instruments typically  
20 include a hand-held instrument, or pencil, which transfers radio-frequency (RF) electrical energy to a tissue site. The electrosurgical energy is returned to the electrosurgical source via a return electrode pad positioned under a patient (i.e., a monopolar system configuration) or a smaller return electrode positionable in bodily  
25 contact with or immediately adjacent to the surgical site (i.e., a bipolar system configuration). The waveforms produced by the RF source yield a predetermined electrosurgical effect known generally as electrosurgical fulguration.

In particular, electrosurgical fulguration comprises the application of electric spark to biological tissue, for example, human flesh or the tissue of internal organs,  
30 without significant cutting. The spark is produced by bursts of radio-frequency electrical energy generated from an appropriate electrosurgical generator. Generally,

fulguration is used to dehydrate, shrink, necrose or char the tissue. As a result, the instrument is primarily used to stop bleeding and oozing. These operations are generically embraced by the term "Coagulation". Meanwhile, electrosurgical cutting includes the use of the applied electric spark to tissue which produces a cutting effect.

5 Electrosurgical searing includes utilizing both electrosurgical energy and pressure to melt the tissue collagen into a fused mass.

As used herein the term "electrosurgical pencil" is intended to include instruments which have a handpiece which is attached to an active electrode and are used to coagulate, cut and/or sear tissue. The pencil may be operated by a handswitch  
10 or a foot switch. The active electrode is an electrically conducting element which is usually elongated and may be in the form of a thin flat blade with a pointed or rounded distal end. Alternatively, the active electrode may include an elongated narrow cylindrical needle which is solid or hollow with a flat, rounded, pointed or slanted distal end. Typically electrodes of this sort are known in the art as "blade",  
15 "loop" or "snare", "needle" or "ball" electrodes.

As mentioned above, the handpiece of the pencil is connected to a suitable electrosurgical source (i.e., generator) which produces the radio-frequency electrical energy necessary for the operation of the electrosurgical pencil. In general, when an operation is performed on a patient with an electrosurgical pencil, electrical energy  
20 from the electrosurgical generator is conducted through the active electrode to the tissue at the site of the operation and then through the patient to a return electrode. The return electrode is typically placed at a convenient place on the patient's body and is attached to the generator by a conductive material.

When using electrosurgical instruments in an operation, the active electrode  
25 may be rendered less efficient if the tissue distorts or encounters inconsistencies in the tissue. These instances are sensed as a change in the tension required to pass the electrode through the tissue (i.e., "drag").

Also, when using electrosurgical instruments in an operation, the tissue tends to char during the surgical procedure and adhere to the active electrode. When the  
30 active electrode is an electrosurgical blade, the charred tissue can in some instances effect the overall performance of the electrosurgical blade. Performance degradation

of the blade may reduce the effectiveness of the instrument during the operation. For example, a build up of charred tissue on the active electrode may effect cutting efficiency of the blade. As a result, the surgeon may find it necessary to increase the electrical current to the electrosurgical blade in order to compensate for the degradation of the cutting blade. This raises the possibility that the tissue will be more easily and rapidly charred when contacting the tissue.

Another concern resulting from the build up of charred tissue on the active electrode is that the charred tissue can fracture and contaminate the surgical site which may delay the overall healing process. The build up of charred tissue on the active electrode may also increase drag (i.e., the amount of resistance the body tissue exhibits during cutting). Drag may distort the tissue and consequently alter anatomical relationships which can effect proper suturing, possibly delay healing, and result in more visible scarring.

Accordingly, the need exists for an electrosurgical pencil which includes drag sensing capabilities to readily alert the operator when the drag force acting on the electrosurgical blade has surpassed a predetermined threshold level and/or the electrosurgical blade has been displaced beyond a predetermined acceptable level.

### SUMMARY

An electrosurgical pencil being configured and adapted to provide an operator with the ability to monitor the degree of drag taking place at the cutting tip of the electrosurgical pencil, as the cutting tip is advanced through body tissue, is disclosed. The electrosurgical pencil includes an elongated housing having a blade receptacle provided at a distal end thereof, an electrocautery blade supported within the blade receptacle, wherein the blade has a distal end extending distally from the housing and a proximal end extending into the housing, an activation button electrically coupled to the blade and a strain gauge affixed to the electrocautery blade for measuring a displacement of the blade. Preferably, the strain gauge is either a wire, a foil, a semiconductor material or an optical strain transducer.

In a preferred embodiment, the strain gauge includes a temperature compensator resistor electrically coupled to the strain gauge or a temperature

compensated transducer. The compensator resistor being configured and adapted to compensate for displacement variations due to changes in temperature.

In a further preferred embodiment, the activation button is supported on the housing. In another preferred embodiment, the strain gauge is mechanically coupled  
5 to a proximal end of the electrocautery blade.

It is contemplated that the strain gauge mounted in the electrosurgical pencil is connected to an appropriate signal conditioner that monitors a change in voltage, a change in electrical current and/or a change in optical wavelength.

It is contemplated that the electrosurgical pencil provide an indication of the  
10 mechanical resistance of the blade passing through tissue in terms of strain gauge signal amplitude. This strain signal output provides sensor feedback in a control system that controls the wave form output of the electrosurgical generator.

It is further contemplated that the electrosurgical pencil preferably include means for producing a signal when the strain gauge measures a displacement of the  
15 blade which satisfies a predetermined level and, more preferably a feedback system which produces an audible and/or a visible signal when the predetermined level is met.

In an alternative embodiment, electrosurgical instrument includes a control circuit electrically coupled between the electrocautery blade and the electrosurgical  
20 generator. The control circuit is configured and adapted to control power supplied to electrocautery blade based on the displacement measured by the strain gauge. Preferably, the control circuit is configured and adapted to increase the power supplied to the electrocautery blade when the displacement of the electrocautery blade, measured by the strain gauge, is greater than a preset value and decreases the  
25 power supplied to the electrocautery blade when the displacement of the electrocautery blade, measured by the strain gauge, is less than a preset value.

These and other objects will be more clearly illustrated below by the description of the drawings and the detailed description of the preferred embodiments.

## 30 **BRIEF DESCRIPTION OF THE DRAWINGS**

The accompanying drawings, which are incorporated in and constitute a part of

this specification, illustrate embodiments of the invention and, together with a general description of the invention given above, and the detailed description of the embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a partially broken away side elevational view of an embodiment of an  
5 electrosurgical pencil in accordance with the present disclosure;

FIG. 2 is a partially broken away side elevational view of another embodiment  
of an electrosurgical pencil in accordance with the present disclosure;

FIG. 3 is a partial broken away side elevational view of yet another  
embodiment of an electrosurgical pencil in accordance with the present disclosure  
10 illustrating a control circuit for automated control of an electrosurgical generator  
output;

FIG. 4 is a schematic flow chart of the electrosurgical generator used in  
connection with the electrosurgical pencil of FIG. 3; and

FIG. 5 is a schematic flow chart of a drag evaluation circuit of the control  
15 circuit.

## **DETAILED DESCRIPTION**

Preferred embodiments of the presently disclosed electrosurgical pencil will  
now be described in detail with reference to the drawing figures wherein like reference  
20 numerals identify similar or identical elements. As used herein, the term “distal”  
refers to that portion which is further from the user while the term “proximal” refers  
to that portion which is closer to the user.

FIG. 1 sets forth a partially broken away side elevational view of an  
electrosurgical pencil constructed in accordance with the present invention and  
25 generally referenced by numeral 10. While the following description will be directed  
towards an electrosurgical pencil it is envisioned that the inventive features of the  
present disclosure can be applied to any electrosurgical type instrument.

Electrosurgical pencil 10 includes an elongated housing 12 configured and adapted to  
support a blade receptacle 14 at a distal end thereof which, in turn, receives a  
30 replaceable electrocautery blade 16 therethrough. A distal portion 17 of blade 16  
extends distally from receptacle 14 and a proximal portion 15 of blade 16 is retained

within the distal end of housing 12. It is contemplated that electrocautery blade 16 may be fabricated from a conductive type material, i.e., stainless steel or coated with an electrically conductive material.

As shown, electrosurgical pencil 10 is coupled to a conventional  
5 electrosurgical generator 18 via connecting wire 20. Connecting wire 20 includes a current wire 22 which electrically interconnects electrosurgical generator 18 and the proximal end of blade 16 and a coating 21 which electrically insulates and encapsulates current wire 22 to protect the operator from stray electrical currents. By way of example only, electrosurgical generator 18 may be any one the following, or  
10 equivalents thereof: the "FORCE FX", "FORCE 2" or "FORCE 4" generators manufactured by Valleylab, Inc of Boulder, Co. Ideally, the electrosurgical generator can be preset to selectively provide an appropriate first predetermined RF signal (e.g., 1 to 300 watts) for tissue cutting and an appropriate second predetermined RF signal (e.g., 1 to 120 watts) for tissue coagulation.

15 Electrosurgical pencil 10 further includes an activation button 24 supported on an outer surface of housing 12. Activation button 24 is operable to control a depressible switch 26 which is used to control the RF electrical energy supplied to blade 16. It is contemplated that electrosurgical pencil 10 further includes an electrical control circuit (not shown) which is electrically coupled between current  
20 wire 22 and activation button 24. In one embodiment the control circuit includes conventional on/off connection capabilities as well as high/low power capabilities utilizing a conventional resistive matrix. It will be apparent to those skilled in the art that virtually any control circuit may be utilized which regulates/monitors the electrical energy passing through current wire 22 between depressible switch 26 and  
25 blade receptacle 14.

In accordance with the present invention, electrosurgical pencil 10 further includes a strain gauge 30 (i.e., a device used to measure mechanical displacement/deflection) mounted to the surface of the proximal end 15 of blade 16. Strain gauge 30 includes a pair of signal wires 32 electrically or a pair of optical fibers  
30 33 (see FIG. 2) optically interconnecting strain gauge 30 to electrosurgical generator 18. Signal wires 32 and/or optical fibers 33 extend from strain gauge 30, through

housing 12 and connecting wire 20, to a meter 36 provided on generator 18. In operation, strain gauge 30 converts small mechanical displacements of blade 16 to electrical or optical signals. The electrical signals reflect the resistance of the meter during displacement, i.e., when a metal is stretched its resistance increases or when an optical transducer is stretched its optical properties change. The measurement of the change in the resistance of the metal in the strain gauge enables the user to readily determine the degree of displacement which corresponds to the change in blade 16. Many different electrical devices may be employed to measure the electrical signal generated from the strain gauge, e.g., voltage meter, amp meter, etc.

It is contemplated that strain gauge 30 be made of wire, foil or semiconductor material. Wire and foil strain gauges are typically constructed by cementing a high-resistance metal to a backing of paper or epoxy, which is then cemented to the structural element (i.e., the proximal end 15 of blade 16). It is contemplated that in order to obtain a higher resistance, the wire or foil making up the strain gauge is often folded in a zig-zag pattern on the backing. As is known in the art, many of the wires and foils which have desirable characteristics as strain gauge materials are also sensitive to changes in temperature. In other words, changes in temperature will alter the resistance of the wire. Thus, in the present instance, wherein changes in temperature in blade 16 are likely, it is contemplated that strain gauge 30 be provided with a compensator resistor 34, placed in close proximity to the strain gauge. Preferably, resistor 34 is configured to compensate for the changes in temperature experienced by blade 16 which are measured by strain gauge 30. It is further contemplated that a semiconductor strain gauge made up of piezoresistive material, usually silicone, be used. In operation, when pressure (i.e., resistance due to drag) is applied to the underlying substrate (i.e., blade 16), the resistance of the metal making up the strain gauge is altered and typically a change in the output voltage and/or electrical current can be monitored. Alternatively, strain gauge 30 could be an optical transducer.

As seen in particular in FIG. 2, strain gauge 30 of electrosurgical pencil 10 includes a pair of optical fibers 33 optically interconnecting strain gauge 30 to electrosurgical generator 18. Optical fibers 33 extend from strain gauge 30, through



housing 12 and connecting wire 20, to a meter 36 provided on generator 18. It is further contemplated, that instead of a finger actuated activation button 24, that electrosurgical pencil 10 include a foot switch 25 electrically coupled thereto via electrosurgical generator 18 for controlling the RF electrical energy supplied to blade 16.

As used in the present invention, as the drag acting against the distal end 17 of blade 16 increases, due to the pressure applied by the operator and/or the build up of charred tissue on blade 16, the deflection and/or displacement of the proximal end 15 of blade 16 will also increase. The displacement of the proximal end 15 of blade 16 is measured by strain gauge 30 which, in turn, converts this displacement into an electrical or optical signal which can be monitored on generator 18. Accordingly, as the operator uses pencil 10 to cut or coagulate, the operator continually monitors meter 36 for any significant changes which surpass a predetermined threshold level. These changes alert the operator that either: 1) the advancement of blade 16 through the tissue site is too fast which may result in the tissue becoming distorted; or 2) that the build up of charred tissue on blade 16 is approaching a level at which continued advancement of electrosurgical pencil 10 may cause the tissue to become distorted.

It is contemplated that electrosurgical pencil 10 may be provided with a feedback system, as will be described in greater detail below, connected to the electrosurgical generator. The feedback of the sensed drag would contribute an input to a control circuit in the generator that modulates the generator output waveform. For example, increased drag would indicate the need for increasing the output current to the active electrode.

It is further contemplated that electrosurgical pencil 10 may be provided with an audible or visible (i.e., light) feedback system (not shown) which would indicate to the operator when the drag acting on the distal end of blade 16 is approaching, has equaled or has surpassed the predetermined threshold level. For example, feedback system can include a buzzer and/or light which are set to be activated when the level on meter 36 reaches a certain predetermined number or range level. In this manner, the operator does not have to actively monitor meter 36. Instead, the operator can focus on the target tissue site and be alerted either by the sound of a buzzer, by the

flashing of a light, or by both when the resistance acting against the advancement of the distal end of blade 16 has become greater than the predetermined threshold level. Over time, it is envisioned that the operator of electrosurgical pencil 10 will condition himself or herself to tactily recognize when the resistance on the distal end of blade 16 is becoming too great.

Turning now to FIGS. 3-5, an electrosurgical pencil 100 having a control circuit 110 configured and adapted for the automated control of an electrosurgical generator 118 is disclosed. As seen in FIG. 3, electrosurgical pencil 100 includes an elongated housing 112 configured and adapted to support a blade receptacle 114 at a distal end thereof which, in turn, receives a replaceable electrocautery blade 116 therethrough. A distal portion 117 of blade 116 extends distally from receptacle 114 and a proximal portion 115 of blade 116 is retained within the distal end of housing 112.

As shown, electrosurgical pencil 100 is coupled to a conventional electrosurgical generator 118 via connecting wire 120. Connecting wire 120 includes a current wire 122 which electrically interconnects electrosurgical generator 118 and the proximal end of blade 116 and a coating 121 which electrically insulates and encapsulates current wire 122 to protect the operator from stray electrical current. Electrosurgical pencil 100 further includes an activation button 124 supported on an outer surface of housing 112. Activation button 124 is operable to control a depressible switch 126 which is used to control the RF electrical energy supplied to blade 116. It is contemplated that electrosurgical pencil 100 further includes an electrical control circuit 110 which is electrically coupled between current wire 122 and activation button 124. In one embodiment, control circuit 110 includes conventional on/off connection capabilities as well as high/low power capabilities utilizing a conventional resistive matrix.

As seen in FIG. 3, electrosurgical pencil 100 further includes a strain gauge 130 mounted to the surface of the proximal end 115 of blade 116. Strain gauge 130 includes a pair of signal wires 132 electrically interconnecting strain gauge 130 to electrosurgical generator 118. Signal wires 132 extend from strain gauge 130, through housing 112 and connecting wire 120, to electrical control circuit 110 of generator

118.

One mode of operation of electrical control circuit 110 is best illustrated with reference to FIG. 4. As seen in FIG. 4, strain measuring device or strain gauge 130 converts a small mechanical displacement of blade 116 to an electrical signal which electrical signal is transmitted through signal wires 132 to a drag evaluation circuit 140 of control circuit 110. It is envisioned that drag evaluation circuit 140 is configured and adapted to receive the electrical signal from strain gauge 130 and evaluate or compare the electrical signal against a preset or know value. Drag evaluation circuit 140 then transmits an evaluation signal to a feedback correction circuit 142 of control circuit 110 which in turn transmits a feedback control signal to an RF energy output circuit 144 of electrosurgical generator 118. RF energy output circuit 144 instructs electrosurgical generator 118 of the change in power, current or voltage to be supplied to blade 116.

Operation of control circuit 110 will now be described in detail with reference to FIG. 5. Electrosurgical pencil 100 and electrosurgical generator 118 are initialized such that strain gauge 130 of blade 116 is calibrated to produce an initial drag value of zero. The surgeon then sets electrosurgical pencil to a desired "drag value" and activates electrosurgical pencil 100 by depressing activation switch 124 thus permitting energy (i.e., electrical current, voltage, etc.) to flow to blade 116. The surgeon then commences the electrosurgical procedure by touching blade 116 to the target surgical site (i.e., body tissue, skin, organ, etc.) at which time blade 116 begins to displace due to the drag sensed thereon. The displacement due to the drag in turn causes strain gauge 130 to produce a drag signal which is transmitted to control circuit 110 of electrosurgical generator 118. Drag evaluation circuit 142 of control circuit 110 receives the measured drag signal and evaluates or compares the measured drag signal against the preset "drag value."

If the measured drag signal is above the preset "drag value", drag evaluation circuit 142 transmits a signal to feedback correction circuit 144 which in turn instructs electrosurgical generator 118 to increase the energy output to blade 116. In addition, feedback correction circuit 144 resets the "drag value" to the value of the higher measured drag signal. If the measured drag signal is not above the preset "drag

value”, drag evaluation circuit 142 evaluates to see if the measured drag signal is below the preset “drag value.” If the measured drag signal is below the preset “drag value”, drag evaluation circuit 142 transmits a signal to feedback correction circuit 144 which in turn instructs electrosurgical generator 118 to decrease the energy output to blade 116. In addition, feedback correction circuit 144 resets the “drag value” to the value of the lower measured drag signal. If the measured drag signal is not below the preset “drag value” the evaluation process repeats from the beginning.

This evaluation process is continually ongoing so long as electrosurgical pencil 100 is activated. Preferably, the evaluation process occurs on the order of 100 times per second. In this manner, the power delivered to blade 116 is constantly monitored and adjusted in order to ensure that minimal trauma to the target site occurs. It is envisioned that the evaluation rate can be adjusted as needed. For example, a higher rate of evaluation may be desired for more delicate target surgical sites while a reduced rate of evaluation may be desired for harder target sites.

It is envisioned that control circuit 110 can be provided with a cut-off control circuit (not shown). Cut-off control circuit would prevent the power being delivered to blade 116 from exceeding a threshold value in order to prevent electrosurgical pencil 100 from transmitting a damaging amount of energy to the target surgical site.

While the present invention has been particularly shown and described with reference to the preferred embodiments thereof, it will be understood by those skilled in the art that the foregoing and other changes in form and details may be made therein without departing from the spirit and scope of the invention. For example, as discussed above, while the present invention has been described as being used in connection with an electrosurgical pencil, it is envisioned that the present invention can be used in connection with any electrocautery device. Therefore, the above description should not be construed as limiting, but merely as exemplifications of preferred embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the present disclosure.

**WHAT IS CLAIMED IS:**

1. An electrosurgical pencil, comprising:  
an elongated housing having a blade receptacle provided at a distal end  
5 thereof;  
an electrocautery blade supported within the blade receptacle, the blade having  
a distal end extending distally from the housing and a proximal end extending into the  
housing;  
an activation button electrically coupled to the blade; and  
10 a strain gauge affixed to the electrocautery blade for measuring a displacement  
of the blade.
2. An electrosurgical pencil according to claim 1, wherein the activation  
button is supported on the housing.  
15
3. An electrosurgical pencil according to claim 1, wherein the strain  
gauge is affixed to a proximal end of the electrocautery blade.
4. An electrosurgical pencil according to claim 1, further comprising:  
20 a meter which is at least one of electrically and optically connected to the  
strain gauge for monitoring at least one of a change in voltage, a change in electrical  
current and a change in optical wavelength.
5. An electrosurgical pencil according to claim 4, wherein the strain  
25 gauge is one of a wire, a foil, a semiconductor material and an optical transducer.
6. An electrosurgical pencil according to claim 5, wherein the strain  
gauge includes a temperature compensator resistor electrically coupled to one of the  
strain gauge or a temperature compensated transducer, the compensator resistor being  
30 configured and adapted to compensate for displacement variations due to changes in  
temperature.

7. An electrosurgical pencil according to claim 5, wherein the semiconductor material is a piezoresistive material.

5 8. An electrosurgical pencil according to claim 1, further comprising:  
means for producing a signal when the strain gauge measures a displacement  
of the blade which satisfies a predetermined level.

9. An electrosurgical pencil according to claim 8, wherein the means for  
10 producing a signal include a feedback system which produces at least one of an  
audible and a visible signal.

10. An electrosurgical instrument, comprising:  
a housing;  
15 an electrocautery blade supported within the housing and extending partially  
therefrom, the blade being coupled to an electrosurgical generator which provides  
electrosurgical energy to the blade;  
an activation switch coupled to the generator which permits selective  
activation of the electrocautery blade; and  
20 a strain gauge in communication with the electrocautery blade for measuring a  
displacement of the electrocautery blade.

11. An electrosurgical instrument according to claim 10, further  
comprising means for monitoring at least one of a voltage, an electrical current and an  
25 optical wavelength passing through the strain gauge.

12. An electrosurgical instrument according to claim 10, further  
comprising means for monitoring at least one of a change in voltage, a change in  
electrical current and an optical transducer.

30

13. An electrosurgical instrument according to claim 10, wherein the strain

gauge is one of a wire, a foil, a semiconductor material and an optical transducer.

14. An electrosurgical instrument according to claim 10, further comprising:

5 means for producing a signal when the strain gauge measures a displacement of the blade which satisfies a predetermined level.

15. An electrosurgical instrument according to claim 10, wherein the electrosurgical instrument is an electrosurgical pencil having an elongate housing.

10

16. An electrosurgical instrument according to claim 10, further comprising:


a signal producing device configured and adapted to produce a signal when the strain gauge measures a displacement of the electrocautery blade, the  
15 electrocautery blade providing a sensory input to the electrosurgical generator control circuitry which in turn modifies the generator output waveform.


17. An electrosurgical instrument according to claim 10, further comprising:

20 a control circuit electrically coupled between the electrocautery blade and the electrosurgical generator, the control circuit being configured and adapted to control power supplied to electrocautery blade based on the displacement measured by the strain gauge.

18. An electrosurgical instrument according to claim 17, wherein the control circuit increases the power supplied to the electrocautery blade when the displacement of the electrocautery blade measured by the strain gauge is greater than a preset value and decreases the power supplied to the electrocautery blade when the
- 5 displacement of the electrocautery blade measured by the strain gauge is less than a preset value.



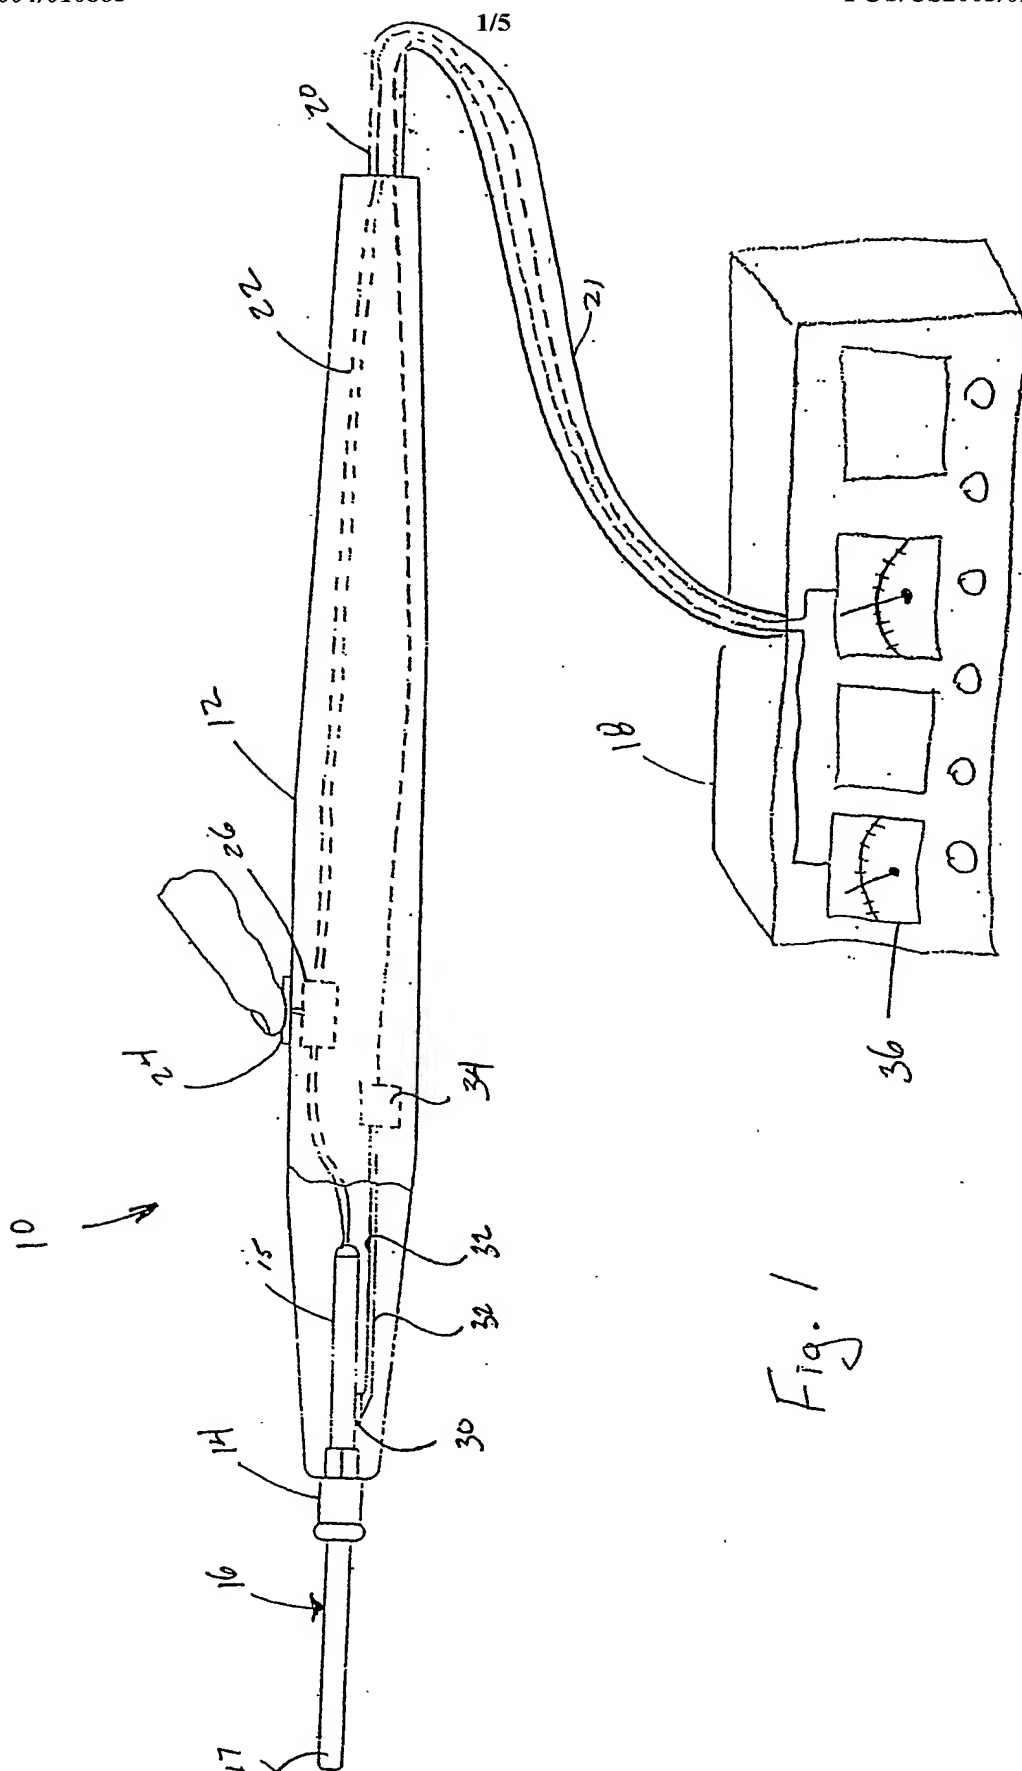

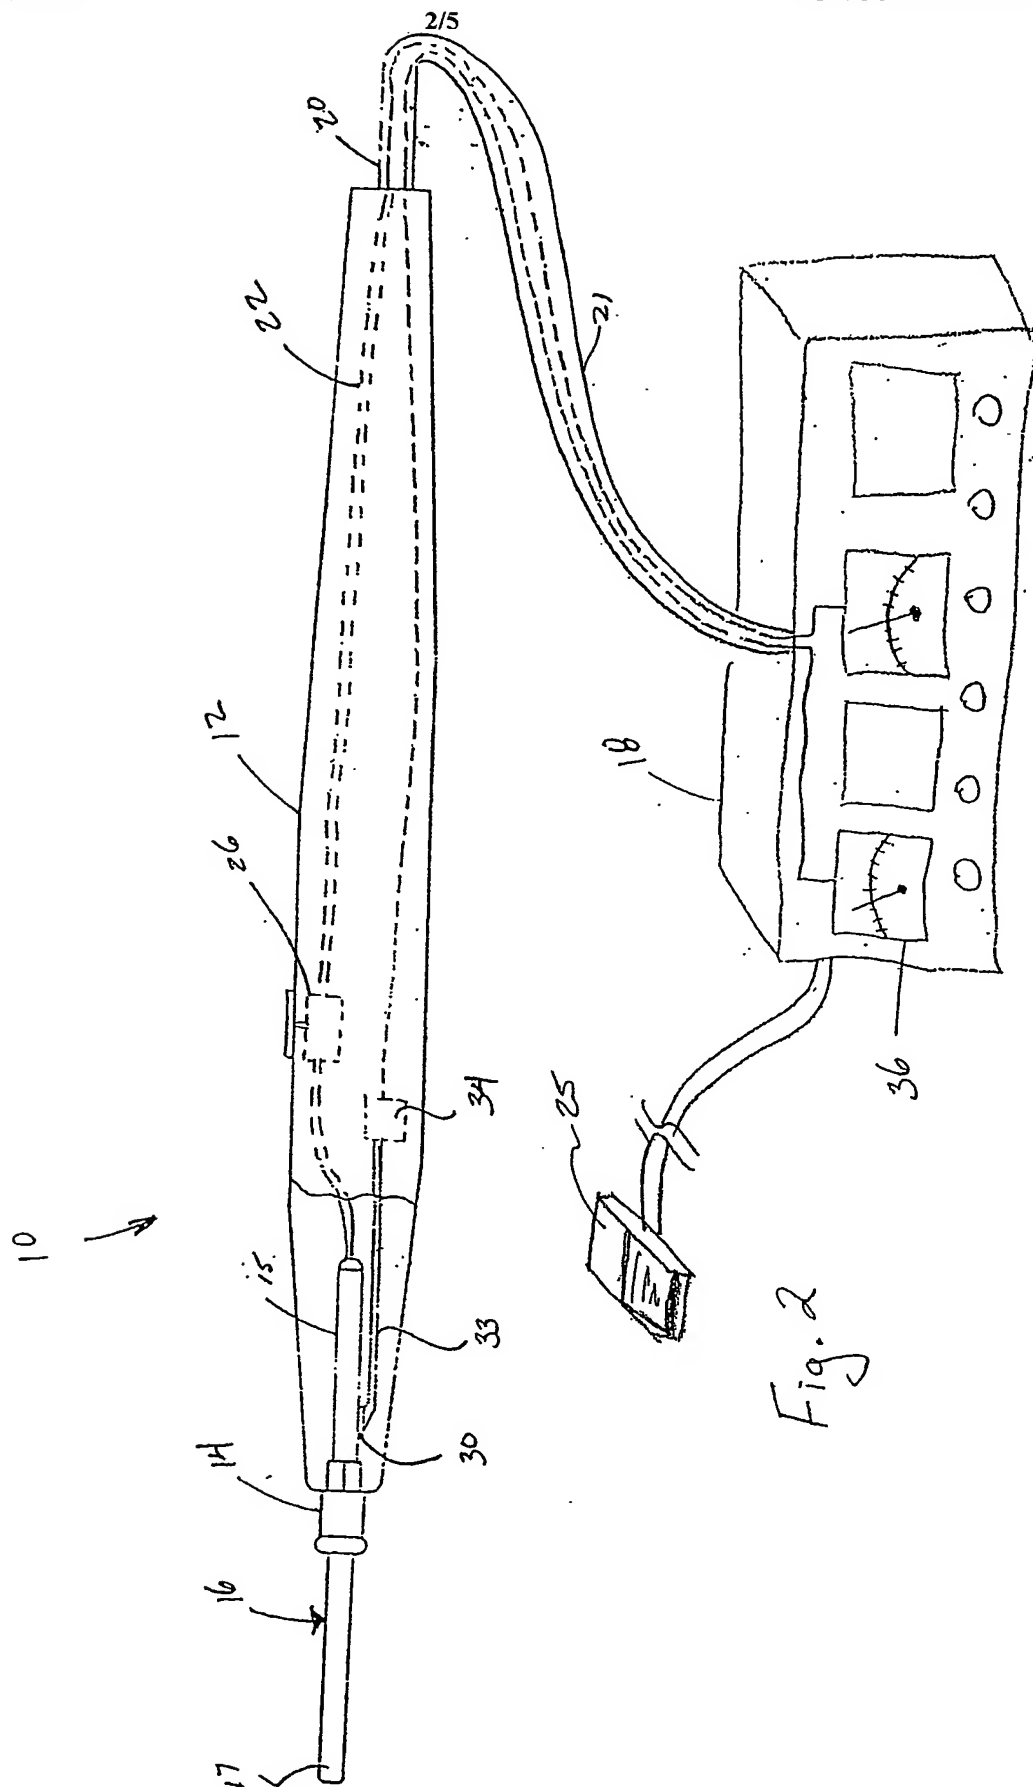

100

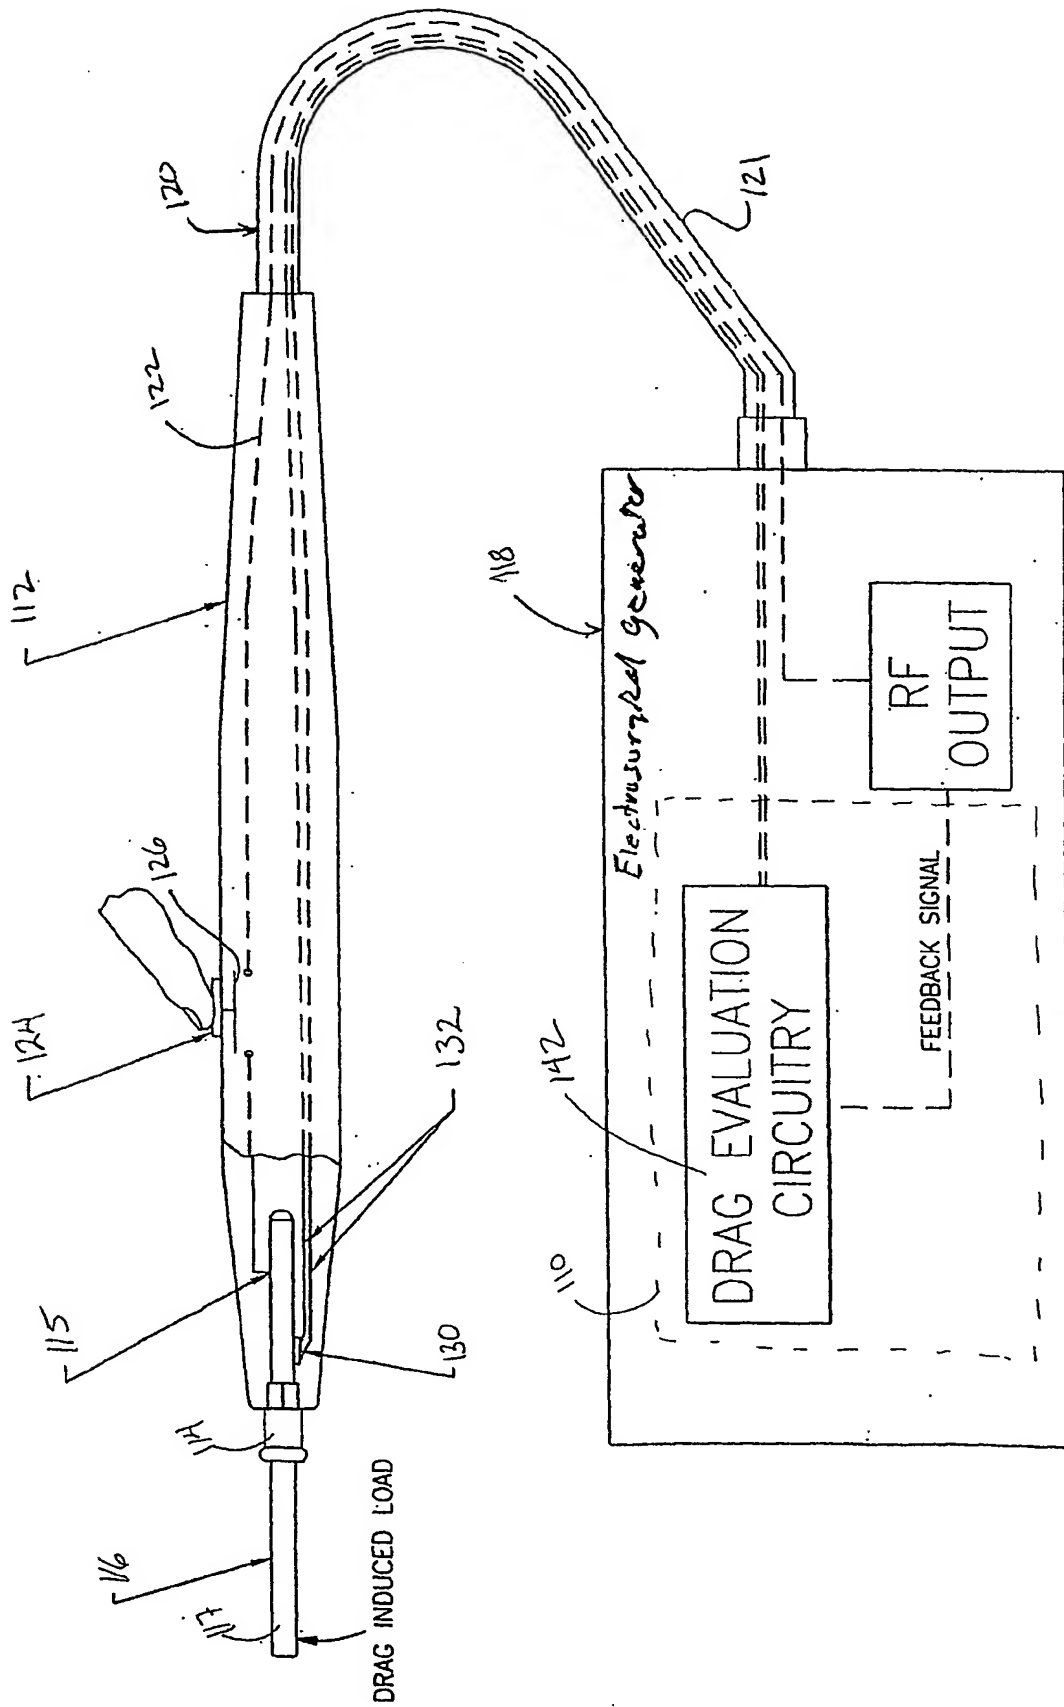


Fig. 3

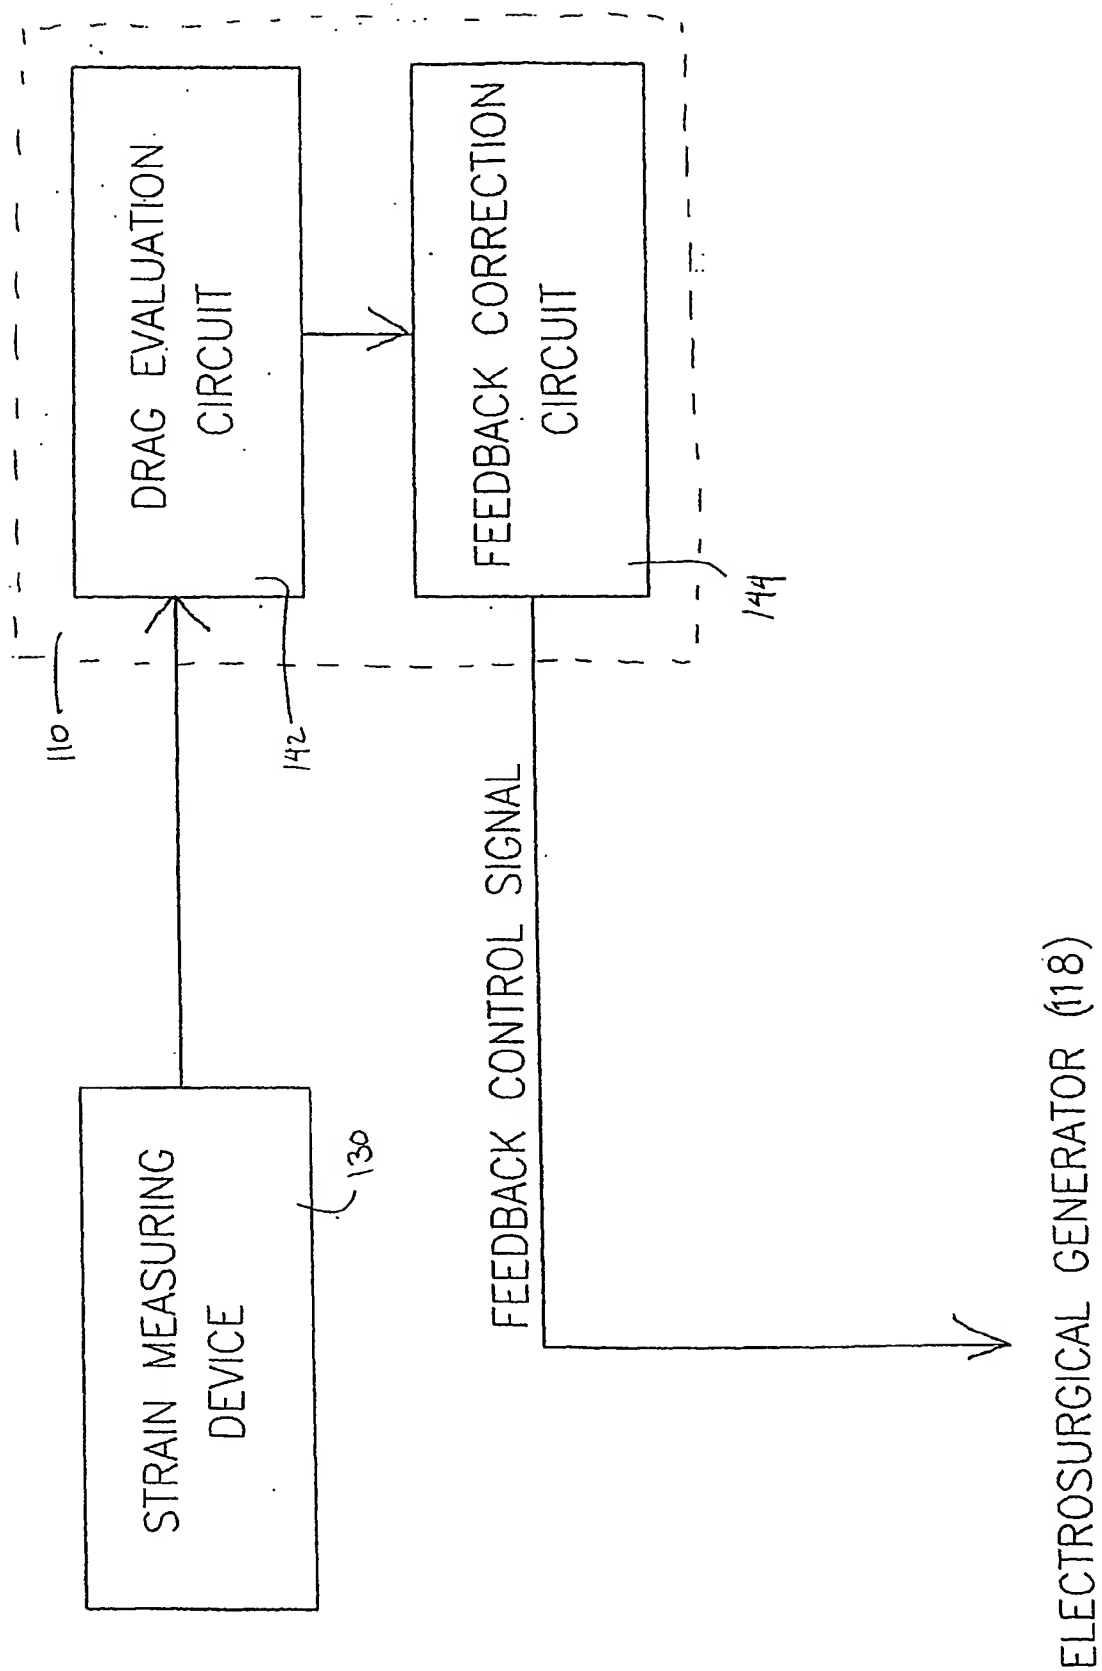


FIG. 4

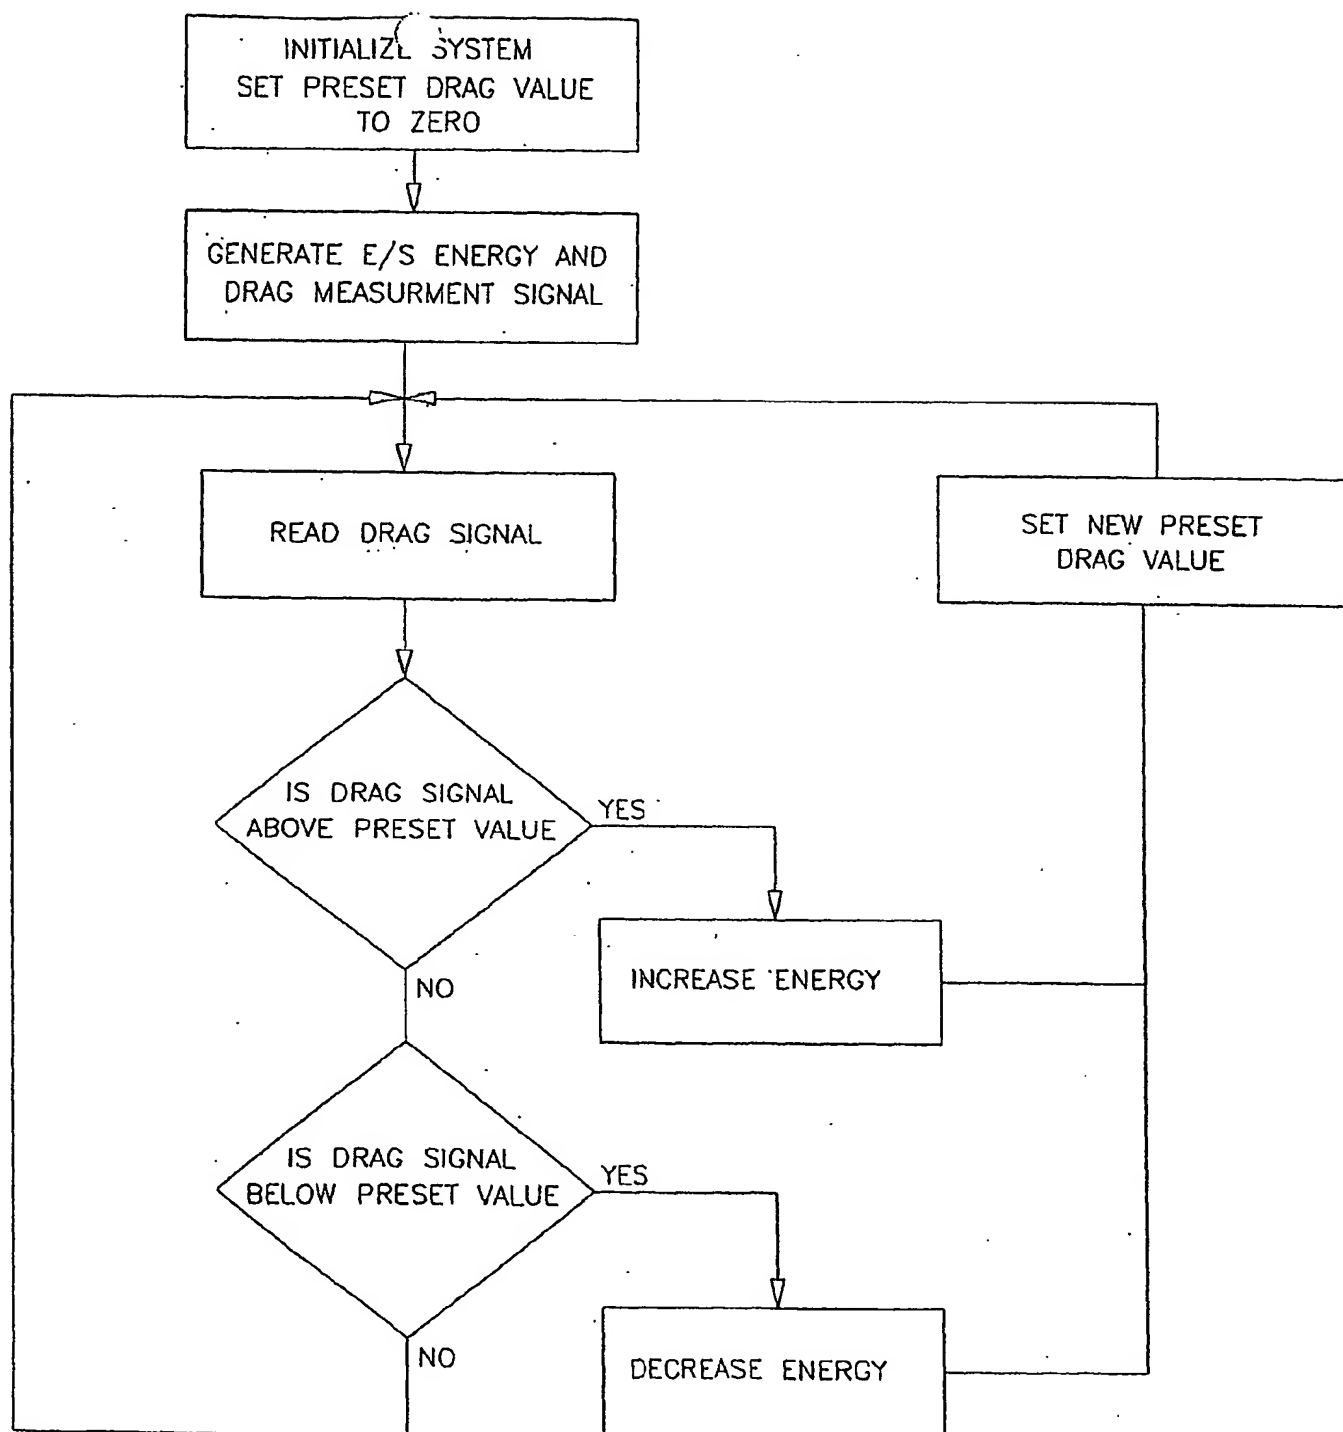


FIG. 5

# INTERNATIONAL SEARCH REPORT

International application No

PCT/US 03/22900

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B18/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | US 5 893 848 A (NEGUS CHARLES CHRISTOPHER ET AL) 13 April 1999 (1999-04-13)<br>column 2, line 31-36,46-57<br>column 5, line 32-64; figure 5 | 1,4,5,<br>7-14        |
| Y          | WO 96 39086 A (VALLEYLAB INC) 12 December 1996 (1996-12-12)<br>page 7, line 18-23<br>page 12, line 14-19; figure 1                          | 1-17                  |
| Y          | US 6 361 532 B1 (BUREK PAUL P) 26 March 2002 (2002-03-26)<br>column 3, line 14-44; figures 1,2,6  | 1-17                  |
| E          | US 2003/199869 A1 (JOHNSON KRISTIN D ET AL) 23 October 2003 (2003-10-23)<br>paragraphs '0016!, '0084!                                       | 10                    |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

02/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Küster, G

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/US 03/22900

| Patent document<br>cited in search report |    | Publication<br>date | Patent family<br>member(s)   | Publication<br>date  |
|---|----|---------------------|--|--|
| US 5893848                                | A  | 13-04-1999          | EP 0949884 A1<br>JP 2000504971 T<br>WO 9817185 A1  | 20-10-1999<br>25-04-2000<br>30-04-1998   |
| WO 9639086                                | A  | 12-12-1996          | AU 5700796 A<br>WO 9639086 A1  | 24-12-1996<br>12-12-1996   |
| US 6361532                                | B1 | 26-03-2002          | WO 9740761 A1  | 06-11-1997   |
| US 2003199869                             | A1 | 23-10-2003          | US 2003014053 A1<br>US 6511480 B1<br>US 6277117 B1<br>WO 02080797 A1<br>US 2003109875 A1<br>AU 756626 B2<br>AU 1225700 A<br>CA 2347014 A1<br>EP 1123058 A1<br>JP 2002528166 T<br>WO 0024330 A1 | 16-01-2003<br>28-01-2003<br>21-08-2001<br>17-10-2002<br>12-06-2003<br>16-01-2003<br>15-05-2000<br>04-05-2000<br>16-08-2001<br>03-09-2002<br>04-05-2000 |

THIS PAGE BLANK (USPTO)